


CAROLINA TRAILERS & EQUIPMENT

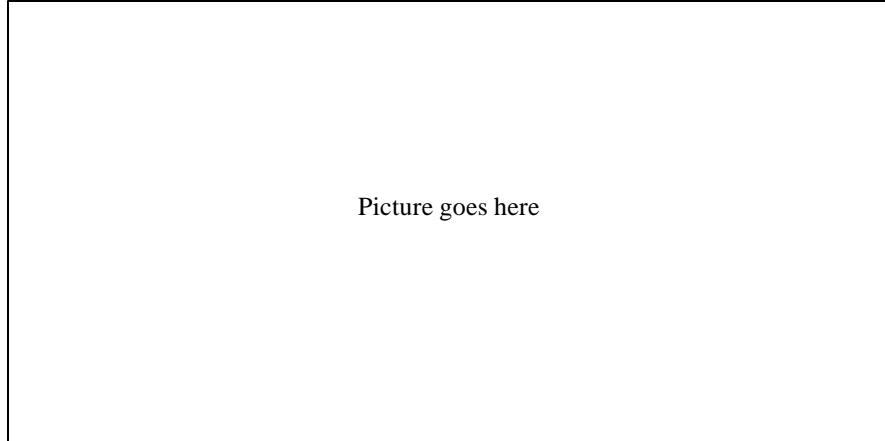

Trailer: 25 Ton Lowboy Paver

Standard Specifications

Framework

Mainframe:	14" WF @ 26# per foot
Crossmembers:	Pierced-Through Frame, 4" WF @ 13 # on 24" Center w/gussets
Flooring:	2" Oak
Ramps:	8' x 36" Hydraulic (optional 42" wide)
DoveTail:	6' Oak Floored

Undercarriage

Axles:	(2) 25,000 lb. Dana Wide Track
Brakes:	Air w/ABS, Spring Park
Tires:	(8) 235-75R 17.5 SBR 18-Ply
Wheels:	17.5 10°

Dimensions

Load Deck Length:	Optional
Upper Deck:	9' (Standard) 2" Oak Floored
Front Slope:	5' Wood or Optional Traction Cleat
Width:	102"
Side Rails:	8" Channel
D-Rings:	(6) per Side
Jack:	2-Speed Landing Gear @ 50,000#

More Specs

DOT Approved; Sealed Beam & Rubber Mounted
Locking Tool Tray in Upper Deck
(1) Driver's Side Step
Heavy-Duty Safety Chain